



STAINLESS STEEL SLAT BAND CHAIN

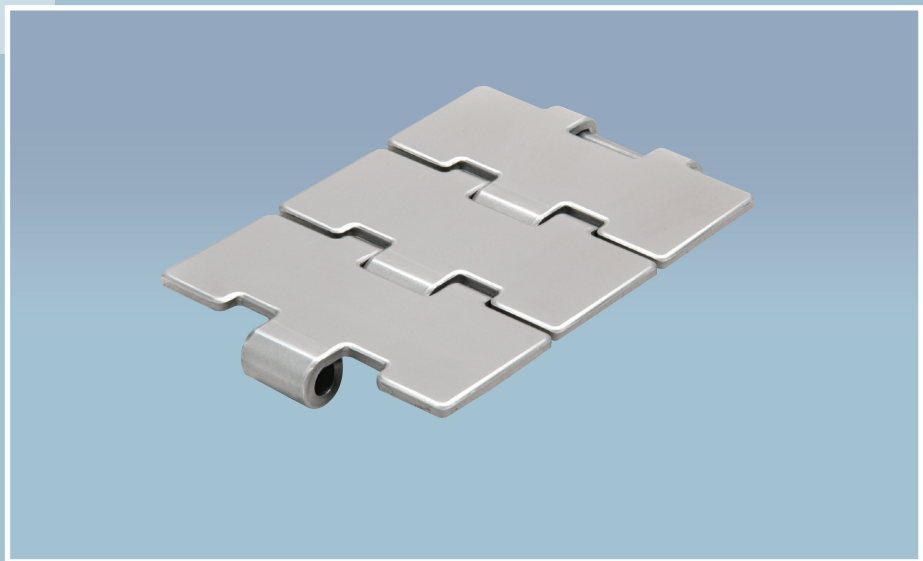

MINI HINGE CHAIN	7
SINGLE HINGE CHAIN	8
DOUBLE HINGE CHAIN	8
MAGNETFLEX CHAIN	9
TABFLEX CHAIN	10
BEVELFLEX CHAIN	10
TS-P CHAIN	11
TRU CHAIN	11


STAINLESS STEEL SLAT BAND STRAIGHT CHAIN

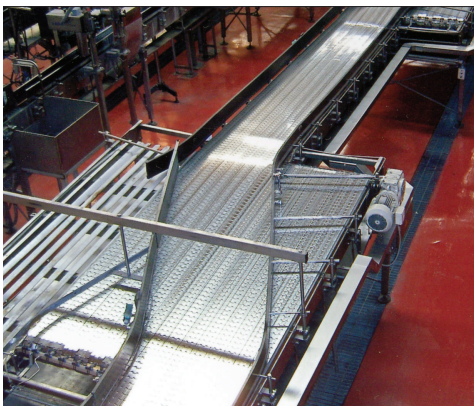


Stainless steel slat band straight chain is classified into mini hinge, single hinge and double hinge. They are separated depending on the width of plate. Mini hinge is very light. And double hinge is appropriate for heavy product transport. Each chain has smooth surface with hairline treatment, and because high quality, reasonably priced material is used to maximize the efficiency of working condition.

스텐레스 스틸 슬레이트 밴드 직선 체인은 미니 힌지와 싱글 힌지와 더블힌지로 분류한다. 그것은 플레이트의 폭에 따라 나뉜다. 미니 힌지는 무게감이 없는 제품이다. 더블힌지는 무거운 제품 이송에 적합하다. 각 체인은 헤어라인 처리를 하여 매끄러운 표면을 가지며 고품질 저가의 재료를 사용해 헤어라인 처리 및 고효율의 최고의 작업 조건을 마련한다.

MINI HINGE CHAIN

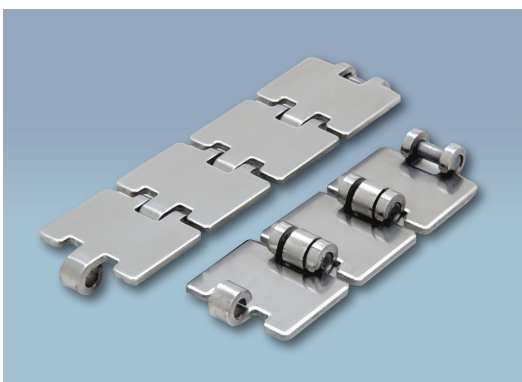



STRAIGHT RUN

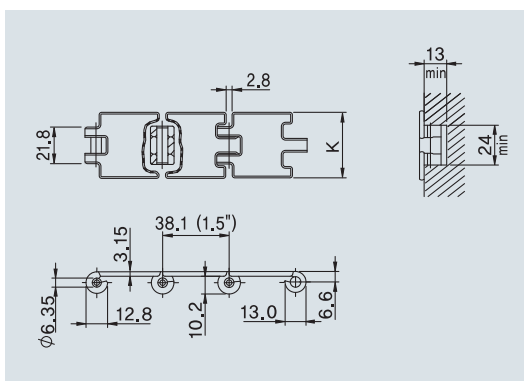

CHAIN TYPE	CODE.NO	MATERIAL		PLATE WIDTH(K)		WORKING LOAD(MAX)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	MM	INCH	N	R	kg/M
SS318S	1152	STAINLESS STEEL		31.8	1.25	2750	75	1.10
SS445S	1153			44.5	1.75	2750	75	1.30

※ Standard length : 3.048m-10feet (80links)

SINGLE HINGE CHAIN

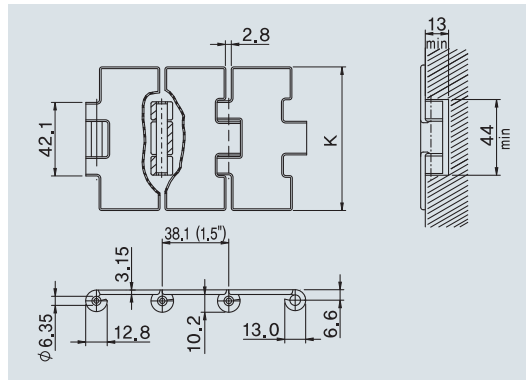
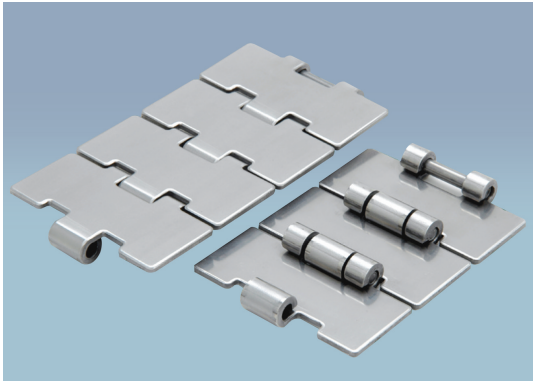


CHAIN TYPE	CODE.NO	MATERIAL		PLATE WIDTH(K)		WORKING LOAD(MAX)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	MM	INCH	N	R	kg/M
SS635S	1155	STAINLESS STEEL		63.5	2.50	4950	75	2.20
SS826S	1156			82.6	3.25	4950	75	2.60
SS1016S	1157			101.6	4.00	4950	75	3.00
SS1143S	1158			114.3	4.50	4950	75	3.30
SS1524S	1159			152.4	6.00	4950	75	4.10
SS1905S	1160			190.5	7.50	4950	75	5.00

※ Standard length : 3.048m-10feet (80links)

DOUBLE HINGE CHAIN


STRAIGHT RUN

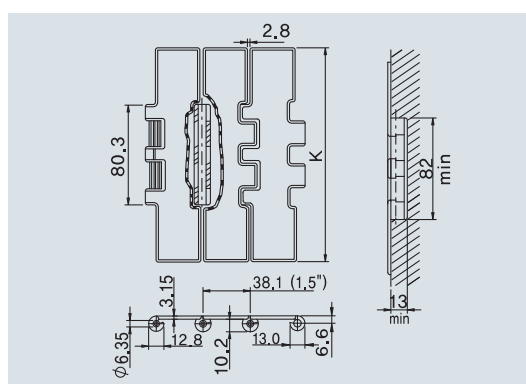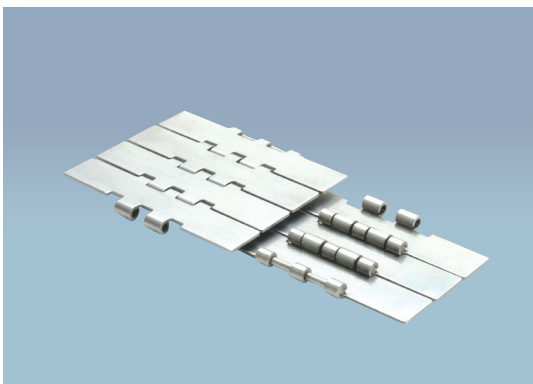

CHAIN TYPE	CODE.NO	MATERIAL		PLATE WIDTH(K)		WORKING LOAD(MAX)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	MM	INCH	N	R	kg/M
SS1905SW	1162	STAINLESS STEEL		190.5	7.50	7000	75	5.60

※ Standard length : 3.048m-10feet (80links)



STAINLESS STEEL SLAT BAND CURVE CHAIN

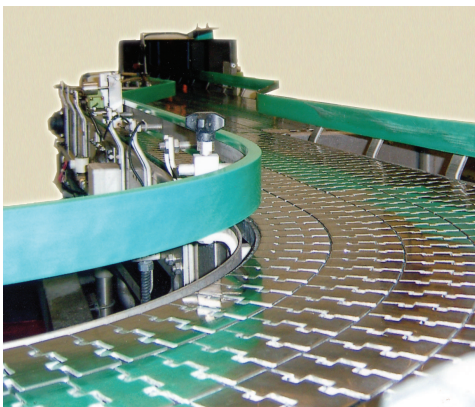

Stainless steel slate band curve chain is divided into 3 depending on the supporting wing shape. Magnetic flex chain has rotating hinge, but is moved by straight sprocket. Magnetic flex chain uses a special track that is magnetic. Therefore, it prevents the chain from deviating away from the track. Tap flex chain is known for easiness to build its track. Bevel flex chain has 10 degree incline that it doesn't stray off. Each chain is treated with hairline for smooth surface. High quality, reasonably priced parts are used to maximize the efficiency of the working condition.

스텐레스 스틸 슬레이트 밴드 커브 체인은 트랙을 돌때 지지하는 날개의 모양에 따라 3개로 나뉜다. 마그네틱 플렉스 체인은 회전 힌지를 가졌지만 직선 스프로킷에 의해 움직인다. 마그네틱 플렉스 체인은 자성을 띤 특별한 트랙을 사용한다. 그래서 체인이 트랙으로부터 이탈하는 것을 방지한다. 탭 플렉스 체인은 트랙 만들기가 매우 간단한 것으로 잘 알려져 있다. 베벨 플렉스 체인은 10도의 경사 날개를 가져 이탈을 방지한다. 각 체인은 매끄러운 표면을 갖도록 헤어라인 처리를 한다. 고품질, 저가의 재료를 사용하여 헤어라인 처리 및 고효율의 최고의 작업조건을 마련하고 있다.



MAGNETFLEX CHAIN

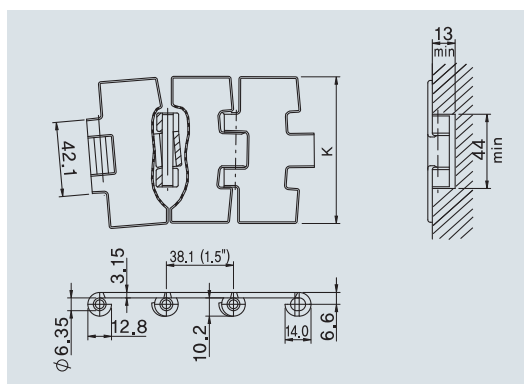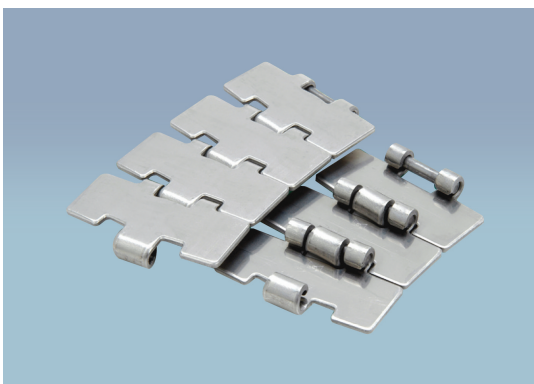

CHAIN TYPE	CODE.NO	MATERIAL		PLATE WIDTH(K)		WORKING LOAD(MAX)	SIDEFLEX RADIUS(MIN)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	MM	INCH	N	R	R	kg/M
SS826CM	1251	STAINLESS STEEL		82.6	3.25	4950		70	2.60
SS1143CM	1252			114.3	4.50	4950	457	70	3.10
SS1905CM	1253			190.5	7.50	4950		70	4.30

※ Standard length : 3.048m-10feet (80links) R500/R610



TABFLEX CHAIN

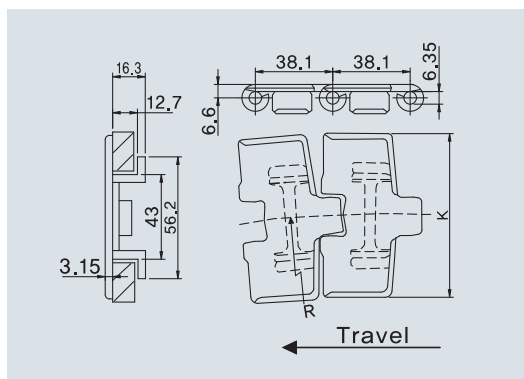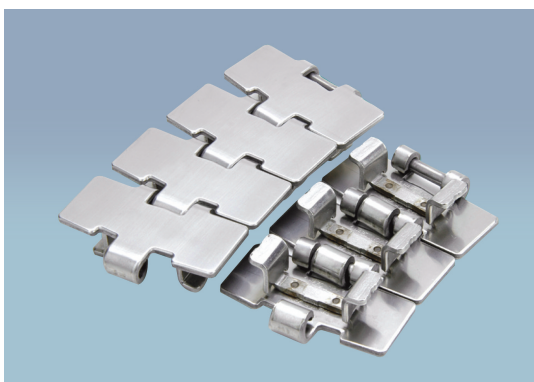

CHAIN TYPE	CODE.NO	MATERIAL		PLATE WIDTH(K)		WORKING LOAD(MAX)	SIDEFLEX RADIUS(MIN)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	MM	INCH	N	R	R	kg/M
SS826CT	1255	STAINLESS STEEL		82.6	3.25	4950	457	70	3.10
SS1143CT	1256			114.3	4.50	4950	610	70	3.80
SS1905CT	1257			190.5	7.50	4950	610	70	5.50

※ Standard length : 3.048m-10feet (80links) R500/R610


BEVELFLEX CHAIN

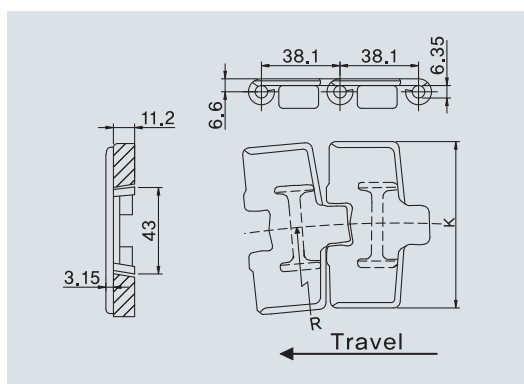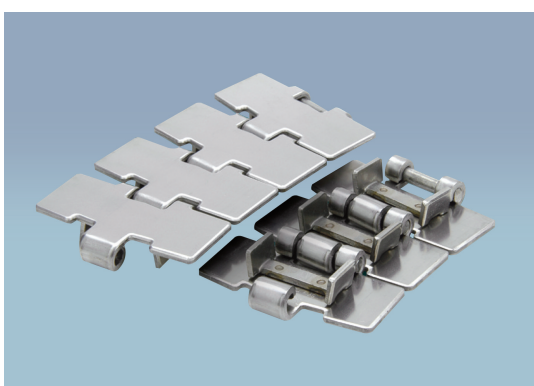


CHAIN TYPE	CODE.NO	MATERIAL		PLATE WIDTH(K)		WORKING LOAD(MAX)	SIDEFLEX RADIUS(MIN)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	MM	INCH	N	R	R	kg/M
SS826CB	1260	STAINLESS STEEL		82.6	3.25	4950	457	70	2.90
SS1143CB	1261			114.3	4.50	4950	610	70	3.60
SS1905CB	1262			190.5	7.50	4950	610	70	5.30

※ Standard length : 3.048m-10feet (80links) R500/R610

TS-P CHAIN

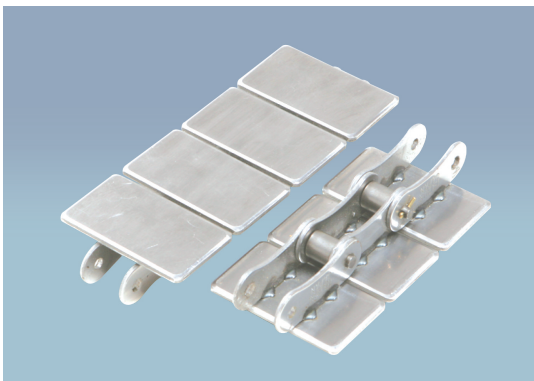


STRAIGHT RUN

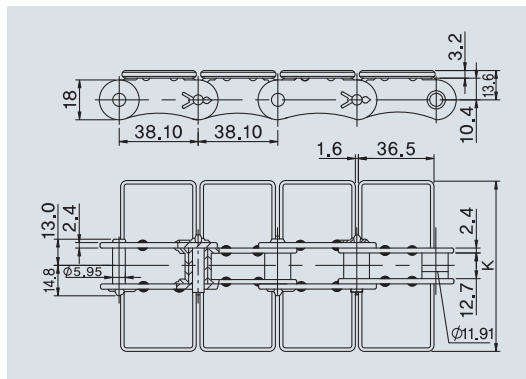


CHAIN TYPE	CODE.NO	MATERIAL			PLATE WIDTH(K)		WORKING LOAD(MAX)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	ROLLER CHAIN	MM	INCH	N	R	kg/M
TS550P	1163	STAINLESS STEEL		STEEL	55.0	2.16	4950	130	2.5
TS635P	1164				63.5	2.50			2.7
TS762P	1165				76.2	3.00			3.0
TS826P	1166				82.6	3.25			3.2
TS1016P	1166-1				101.6	4.00			3.7
TS1143P	1167				114.3	4.50			4.0
TS1524P	1168				152.4	6.00			4.9
TS1905P	1169				190.5	7.50			5.8

※ Standard length : 3.048m-10feet (80links)

TRU CHAIN

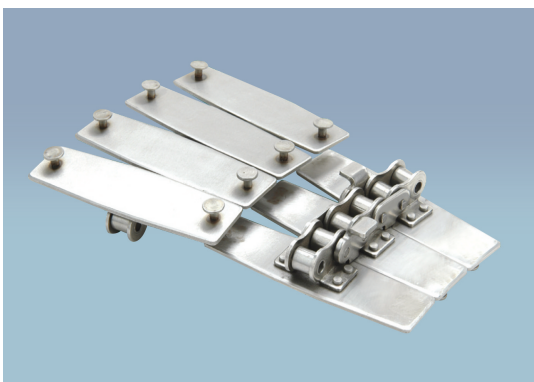

SIDEFLEX RUN

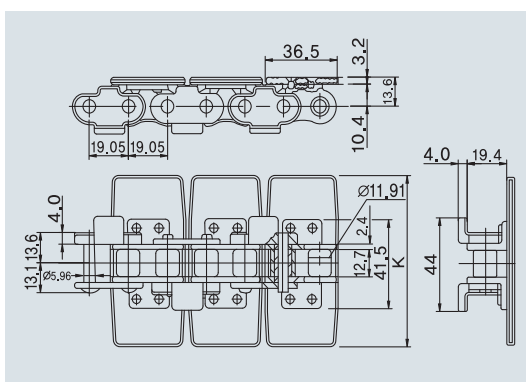

CHAIN TYPE	CODE.NO	MATERIAL			PLATE WIDTH(K)		WORKING LOAD(MAX)	SIDEFLEX RADIUS(MIN)	BACKFLEX RADIUS(MIN)	WEIGHT
		PLATE	PIN	ROLLER CHAIN	MM	INCH	N	R	R	kg/M
TRU826C	1265	STAINLESS		STEEL	82.6	3.25	4950	600	130	4.7
TRU1270C	1266	STEEL			127.0	5.00		1000		5.7

※ Standard length : 3.048m-10feet (80links)